


ALFRA ROTABEST® – RB 50 X

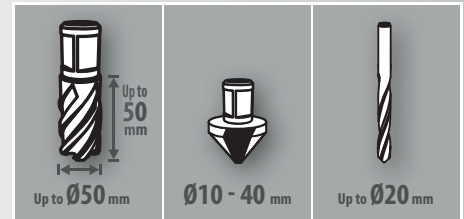

RB 50 X

Core drill dimensions	Ø 12.0 - 50.0 mm
Cutting depth	50.0 mm
Twist drill	Ø 1.0 to 16.0 mm with quick-release chuck MT 2 up to Ø 20.0 mm with MT 2 DIN 345 direct
Counterboring	Ø 10.0 - 40.0 mm
Tapping	with tapping attachment M3 - M20
Arbors	MT2
Stroke	190 mm
Height adjustment	100 mm
2-speed gearbox Load speed	1. Step 250 rpm 2. Step 450 rpm
Power consumption	1,200 W
Voltage	230 V 50/60 Hz 110 V 50/60 Hz
Tool force (10 mm)/magnetic adhesion strength	3,500 N/11,000N
Magnetic base	92 x 220 mm
Weight	15.0 kg

Motor	
Smooth start	✓
Hybrid relay	✓
Motor emergency stop	✓
Gearboxes	
Oil bath gearbox	✓
Slides	
Infinitely adjustable	✓
Self-adjusting guide	✓
Operation	
Soft-touch grips	✓
Membrane keyboard	✓
Holder for Allen key	✓
Cable length 5 m	✓
Magnet	
Sensor/LED	✓
Metal rings	✓
Performance and weight optimisation	✓
Made in Germany	
	✓

Scope of delivery	
<ul style="list-style-type: none"> • Metal core drill RB 50 x • Incl. coolant system and tool holder with internal cooling (Prod.-No. 18003) • Carrying case • Drill spray • Seat belt • Operating Instructions • incl. 1 core drill free 	

ALFRA Rotabest® RB 50 X	230 Volt
ALFRA Rotabest® RB 50 X	110 Volt

Prod.-No.

18751

18751.110